


The 800 Series Cyclorama Track is especially suited for use in large television studios. Equipped with neoprenetired ball bearing single carriers and neoprene bumpers to insure quiet operation. Track available curved to a minimum radius of 4 feet and in straight sections. Track sections available in 10 and 20 foot standard lengths.

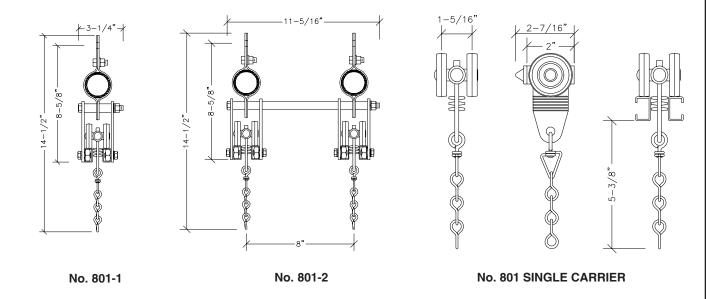

## GENERAL SPECIFICATIONS: WALK-ALONG CYCLORAMA TRACK

Provide **Model 801-1** as manufactured by H & H Specialties Inc., South El Monte, CA.

Track shall be constructed of carrier rails roll-formed from 16 gauge galvanized steel into 1" x 5/8" "C" channel. Two rails shall be suspended from 1-1/2" Sch. 40 pipe backbone on 2'-0" intervals by steel hanger assemblies creating a 3/4" continuous slot for passage of carrier bodies.

Provide single carriers, spaced on 12" centers, constructed of two neoprene-tired wheels fastened parallel to carrier body. Nylatron GS nylon shall be molded around shielded and greased ball bearing to form carrier body with integral glides to keep carrier aligned at all times. Install tapered neoprene bumper into carrier body to reduce noise. Supply with heavy duty hook, swivel eye and trim chain for attachment of curtain.

Also available as **Model 801-2** with two sets of rails, spaced 8" on center.

**36** Rev. 02/01